


## Surface Mount Attenuator 10 Watts, 0 dB

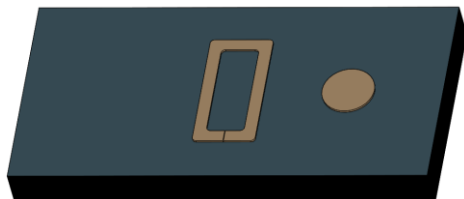

The XRA10AA0SES is a high performance Alumina (Al<sub>2</sub>O<sub>3</sub>) chip attenuator intended as a cost competitive alternative to Beryllium Oxide (BeO). It is designed particularly for LTE and 5G wireless communication frequency bands. The high power handling makes the part ideal for inter-stage matching, directional couplers, and for use in isolators. The attenuator is also RoHS compliant!

### Features:

- RoHS Compliant
- 10 Watts
- Low Cost
- DC – 6.0GHz
- Al<sub>2</sub>O<sub>3</sub> Ceramic
- Non-Nichrome Resistive Element
- Low VSWR
- 100% Tested

### General Specifications

<b>Resistive Element</b>	Thick film
<b>Substrate</b>	Al <sub>2</sub> O <sub>3</sub> Ceramic
<b>Terminal Finish</b>	Matte Tin over Nickel Barrier
<b>Operating Temperature</b>	-55 to +150°C (see de rating chart)


Tolerance is ±0.010", unless otherwise specified. Designed to meet or exceed applicable portions of MIL-E-5400. **All dimensions in inches.**

### Electrical Specifications


<b>Attenuation Value:</b>	0dB ± 0.1 dB
<b>Power:</b>	10 Watts
<b>Frequency Range:</b>	DC – 6.0GHz
<b>Input Return Loss:</b>	>20dB

Specification based on unit properly installed using suggested mounting instructions and a 50 ohm nominal impedance. **Specifications subject to change.**


### Outline Drawing

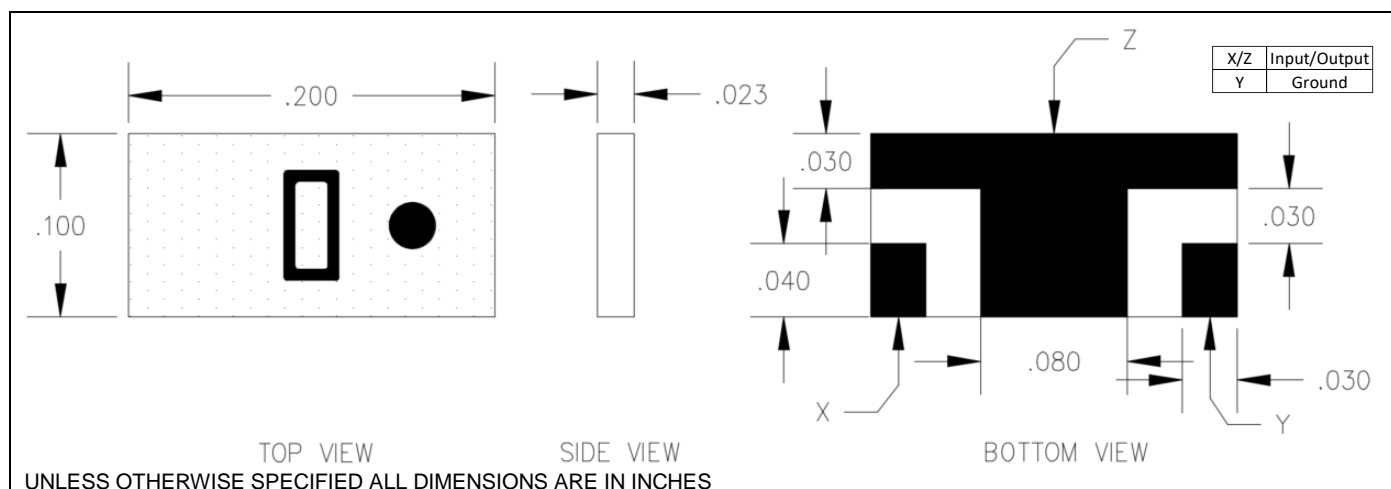


## Typical Performance

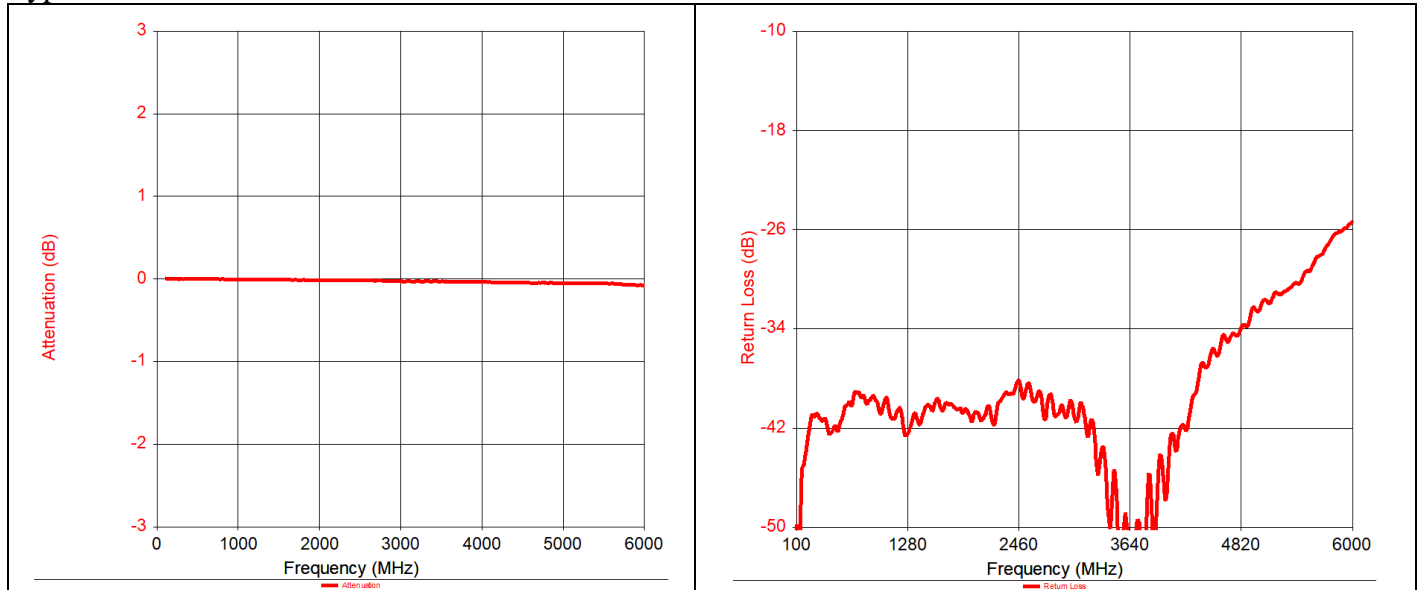

## Power de-rating:

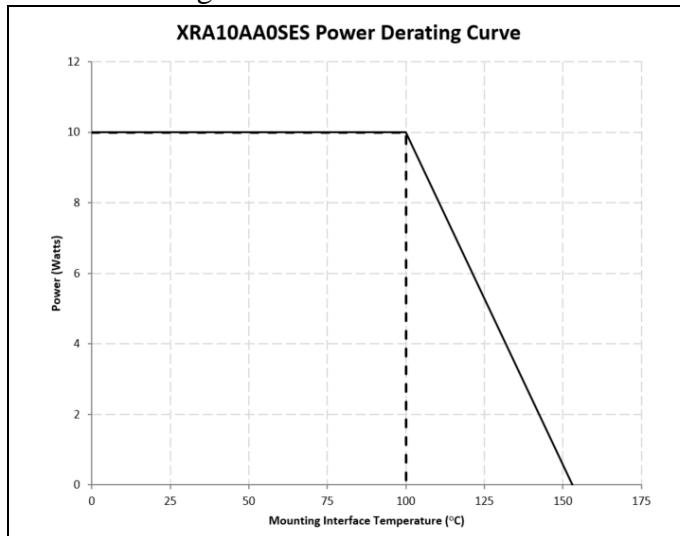

## Mounting Footprint:

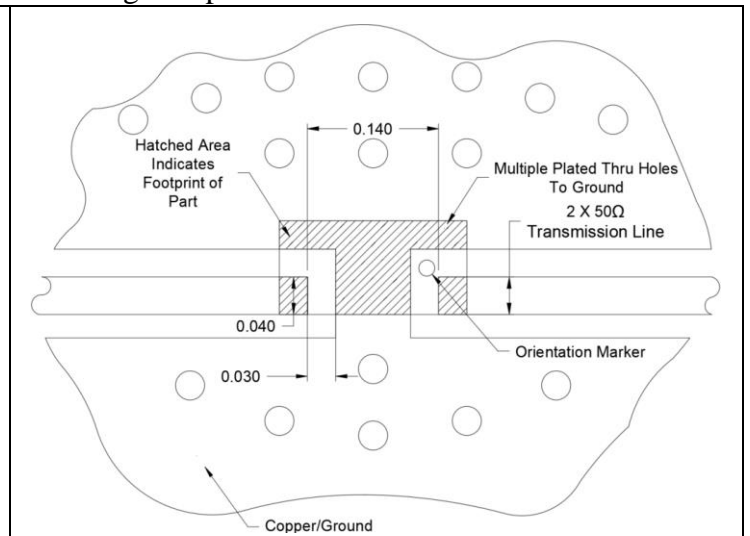

## Tape & Reel Information:

