

### Surface Mount Attenuator 10 Watts, 30dB



The XRA10AA30SES is a high performance Aluminum Nitride (AlN) chip attenuator intended as a cost competitive alternative to Beryllium Oxide (BeO). It is designed particularly for LTE and 5G wireless communication frequency bands. The high power handling makes the part ideal for inter-stage matching, directional couplers, and for use in isolators. The attenuator is also RoHS compliant!

#### Features:

- RoHS Compliant
- 10 Watts
- Low Cost
- DC – 6.0GHz
- AlN Ceramic
- Non-Nichrome Resistive Element
- Low VSWR
- 100% Tested

#### General Specifications

<b>Resistive Element</b>	Thick film
<b>Substrate</b>	AlN Ceramic
<b>Terminal Finish</b>	Matte Tin over Nickel Barrier
<b>Operating Temperature</b>	-55 to +150°C (see de rating chart)


Tolerance is  $\pm 0.010"$ , unless otherwise specified. Designed to meet or exceed applicable portions of MIL-E-5400. **All dimensions in inches.**

#### Electrical Specifications



<b>Attenuation Value:</b>	30dB $\pm 1.5$ dB	DC – 5.0 GHz
	30dB $\pm 2.0$ dB	5.0 – 6.0 GHz
<b>Power:</b>	10 Watts	
<b>Frequency Range:</b>	DC – 6.0GHz	
<b>Input Return Loss:</b>	20dB	DC - 5.0GHz
	18dB	5.0 – 6.0GHz

Specification based on unit properly installed using suggested mounting instructions and a 50 ohm nominal impedance. **Specifications subject to change.**


#### Outline Drawing

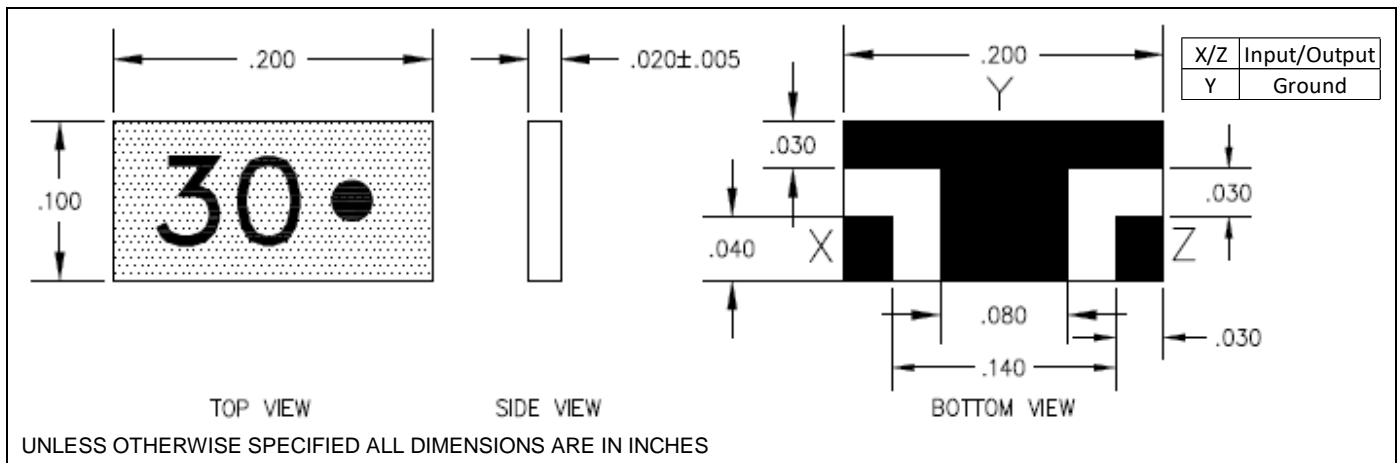


## Typical Performance:

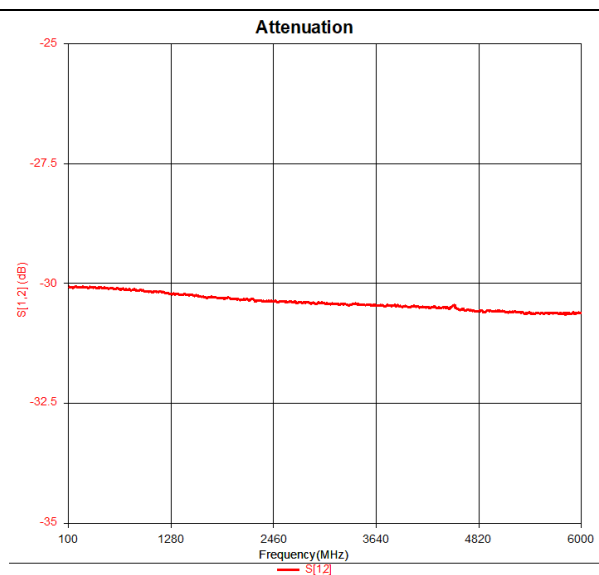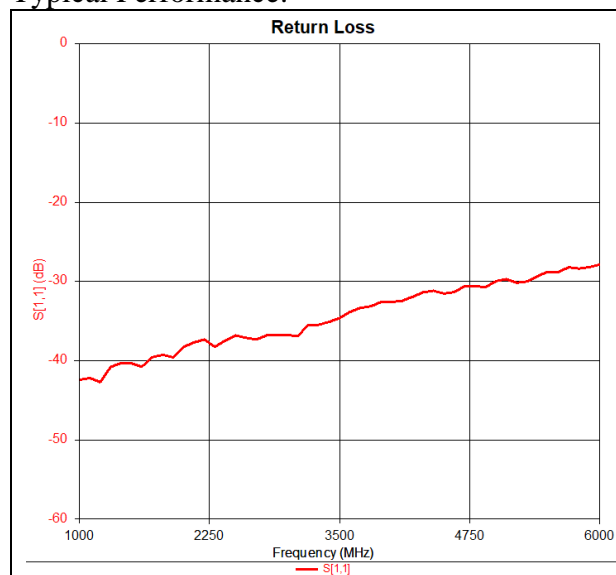

## Power De-rating

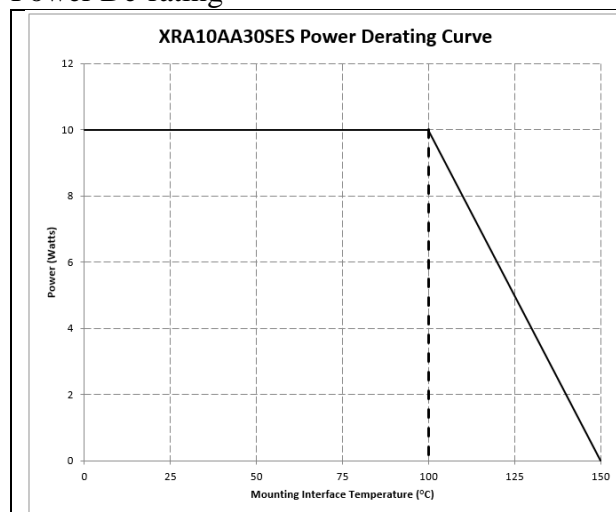

## Mounting Footprint:

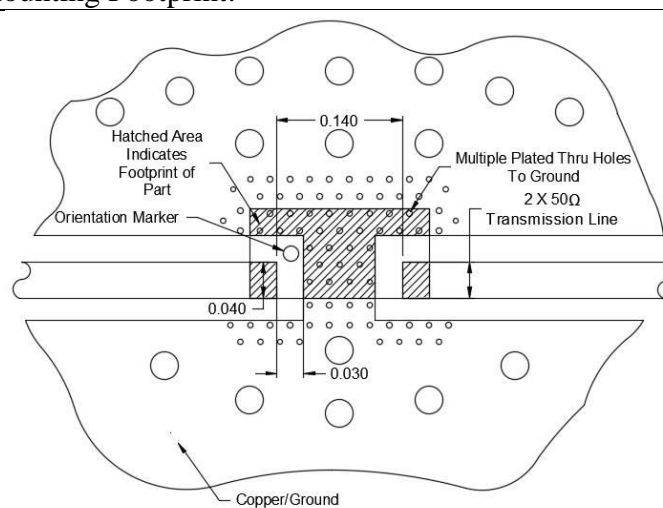

## Tape & Reel:

